

# Loop 1604

**From Lower Seguin  
Road to IH 10  
Public Meeting**

**February 27, 2013  
6:30 PM**



**Texas Department of Transportation**

# Technical Presentation

- Project Background
- Project Objectives
- Project Description
- Environmental Issues
- Project Schedule
- Questions



# Project Background

---

- Loop 1604 is a regional commuter route, but serves primarily as a major thoroughfare providing access to development in Bexar County.
- Increased traffic has resulted in an increase in congestion. Traffic Projections generated by TxDOT in November 2011 indicate trend will continue.

	<b>AADT 2012</b>	<b>AADT 2032</b>
Loop 1604	25,100	39,200

# Project Objectives

---

- To improve safety along the project area
- To improve mobility by reducing congestion
- Accommodate regional traffic needs
- Accommodate local circulation traffic needs



# Project Layout



**Loop 1604**  
**From Lower Seguin Road to IH 10**  
**(2.6 miles)**

# Existing Typical Section




# Project Description

- Expand roadway to 4-lane divided highway including dual 2100 LF Bridges.
- Expansion within existing right-of-way (260-365 feet)
- Upgrade traffic signal at Autumn Run and flashing beacon at Graytown Road.
- Grass median will include cable barrier
- Increase shoulder width



# Project Typical Section

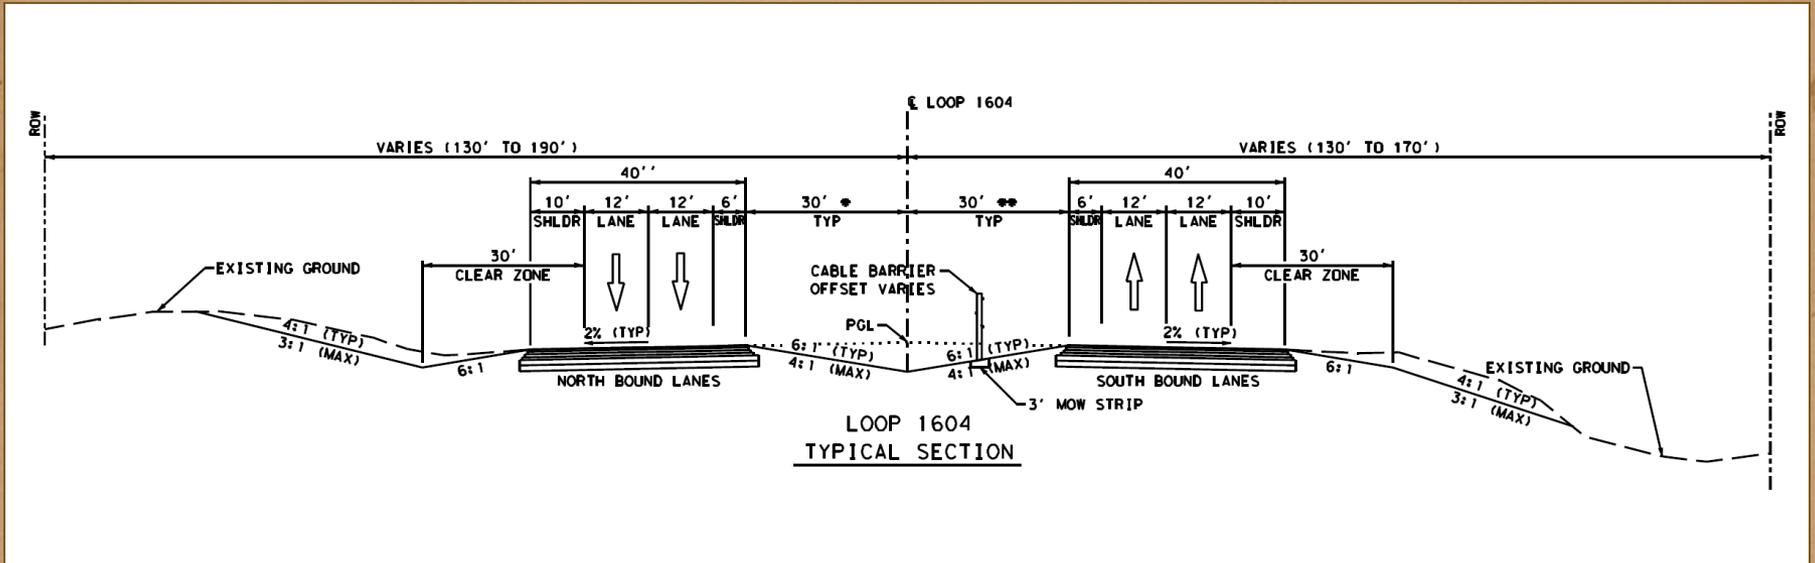

# Environmental Issues

---

---

- TXDOT completed environmental study and obtained environmental clearance prior to design phase
- Corps permits obtained at Salitrillo Creek
- Environmental compliance will be monitored throughout construction



# Construction Sequencing

---

---

- Phase 1: Construct Northbound Lanes. Traffic Patterns same as Today
- Phase 1: Ware Seguin Road and Graytown Road will have Temporary Detours
- Phase 2: Short Term Traffic switches to Construct IH-10 Frontage Road Intersection
- Phase 3: Switch Traffic to Newly Constructed Northbound lanes. Reconstruct Southbound Lanes

# Project Schedule

---

---

- Design phase completed December 2012
- Bid and Award Project (Spring 2013)
- Begin Construction (Summer 2013)
- Construction to last approximately 18 months
- Project completion estimated Early 2015
- Estimated Construction Cost \$22.9 Million

# Questions?

## Contact Information

**David R. Wegmann, P.E.**  
**Engineering Services Manager –**  
**Transportation/Flood Control**  
**233 N. Pecos La Trinidad,**  
**Suite 420**  
**San Antonio, Texas 78207**

**Main: (210) 335-6700**

**Direct: (210) 335-3816**

**Email: [dwegmann@bexar.org](mailto:dwegmann@bexar.org)**

